



DUALIE HANDLEBAR CONSOLE INSTRUCTIONS

(800) 893-2447 www.bobgear.com email- bob@bobgear.com
Phone: (208) 375-5171 Fax: (208) 375-5172, 5475 Gage St. Boise, ID 83706

Congratulations on your purchase of the BOB Duallie Handlebar Console. It is designed to provide beverage holders and additional storage. Proper installation and care will provide years of reliable service.

Before attempting to install your new Handlebar Console, read and understand these instructions completely to insure proper installation. If you are unclear on any point, contact your dealer or BOB before use.

⚠ WARNINGS ⚠

- This product is not designed to hold hot beverages. Placing hot beverages in the cup holders can result in spills and injury to you or your child, including burns.
- When placing containers in the cup holders, it is critical that at least 60% of the container be inserted in the beverage holder so containers do not come out.
- The Duallie Handlebar Console is designed exclusively for use with BOB double strollers. It is not intended for use with other strollers or products.

INSTALLATION

1. Begin by orienting the Handlebar Console as shown in figure 1. The front edge of the console aligns approximately 1" behind the back of handlebar cross tube/canopy flap.

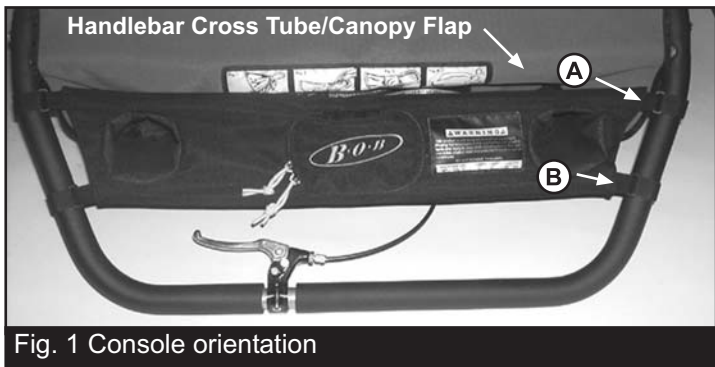


Fig. 1 Console orientation

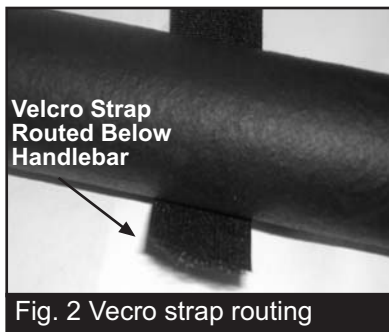


Fig. 2 Vecro strap routing



Fig. 3 Velcro strap routing

2. The Handlebar Console attaches to the stroller handlebar by 4 velcro straps. Start attaching the Handlebar Console to the handle bar with the forward right velcro strap, "A" in figure 1. The strap attaches as follows:

A) Align the strap with the bend in the handlebar. Route the strap underneath the handlebar. Correct routing of the velcro strap is shown in figure 2.

B) Continue wrapping the velcro strap around the handlebar and insert through the black plastic ring as shown in figure 3.

C) Loop the velcro strap through the ring and secure as shown in figure 4.

D) Repeat with the above steps with the forward strap



in figure 3.

C) Loop the velcro strap through the ring and secure as shown in figure 4.

D) Repeat with the above steps with the rear strap on the opposite side.

3. Next, attach the back right strap, "B" in figure 1. The strap attaches as follows:

A) Align the strap so the Handlebar Console is pulled tight fore and aft. Route the strap underneath the handlebar. Correct routing of the strap is shown in figure 2.

B) Continue wrapping the velcro strap around the handlebar and insert through the black plastic ring as shown

CARE INSTRUCTIONS

Hand wash cold, hang dry, do not dry clean or iron.

LIMITED WARRANTY

BOB Trailers Inc. takes pride in its workmanship and strives to manufacture the best products possible. Therefore, we warranty the Handlebar Console against defects in material and workmanship subject to the conditions listed below. Since no product is indestructible, it does not cover defects attributable to or resulting from normal wear, abuse or alteration.

- The Handlebar Console is warranted for one year from the date of original purchase.
- Warranty is only valid for the original purchaser.
- Proof of purchase is required to exercise this warranty.
- Labor and freight charges are not included.
- Normal wear, neglect, abuse, accidents, improper use are not covered by this warranty.
- Warranty claims must be made through an authorized dealer.
- This warranty is limited to the repair or replacement of the defective part. BOB shall in no event be responsible for consequential or special damages.
- This limited warranty is the only express or implied warranty applicable to BOB. Any implied warranties, including warranties of merchantability and fitness shall be limited in scope and duration in accordance with this limited warranty.

on the opposite side.