



Congratulations on your purchase of the BOB Diaper Bag. It is designed with features to provide organization and capacity for lightweight, small, yet essential items you wish to bring with you. You can carry the Diaper Bag on your shoulder "Messenger Style" or attach it directly to the handlebar of a BOB stroller.

Before attempting to use or attach your new Diaper Bag, read and understand these instructions to ensure proper assembly and operation. If you are unclear on any point, contact your dealer or BOB before use.

▲ WARNINGS ▲

- Never exceed 7 lb (3.2 Kg) in Diaper Bag when hanging from stroller handlebar. Overloading Diaper Bag may cause your stroller to become unstable or tip over, injuring you and/or your child and/or damaging stroller.
- Attaching BOB Diaper Bag on stroller brands other than BOB Strollers may result in an unstable, dangerous condition.
- Only attach Diaper Bag to an occupied stroller on flat terrain.
- Always attach BOB Diaper Bag to the points on the handlebar closest to the seat back (as far forward as possible).
- Always detach BOB Diaper Bag from stroller **before** removing child from stroller.
- Due to maximum weight related safety concerns, Diaper Bag is not intended to be used with Handlebar Console.



Fig. 1 Diaper Bag direct attachment features.

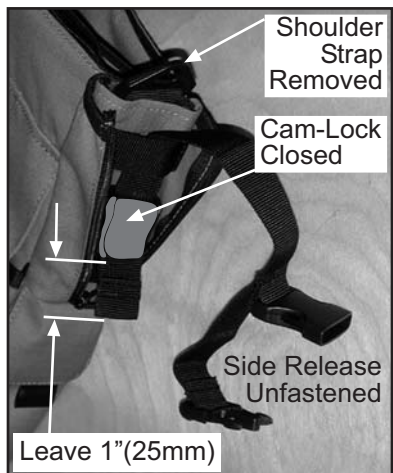


Fig. 2 Attachment Strap and Cam-Lock set-up.

INSTALLATION INSTRUCTIONS

1. Fig. 1 illustrates the attachment components and external features of the BOB Diaper Bag. The Bag comes with a removable shoulder strap and also features a strap system designed for direct attachment to handlebar of a BOB stroller.

2. To install the Diaper Bag directly on your BOB single or double stroller, follow these instructions in sequence. (We recommend attaching the empty BOB Diaper Bag to your BOB stroller and becoming familiar with the attachment before using.)

3. Make sure stroller is on level ground. Prepare stroller by engaging parking brake. If Handlebar Console is attached, remove it from handlebar.

4. Remove shoulder strap from Diaper Bag.

5. Unzip end pockets of Diaper Bag, revealing the attachment components. Pull straps out and unfasten side release buckles.

6. Open each Cam-Lock. Pull out adjusting straps. Close each Cam-Lock leaving about 1" (25mm) strap below cam-lock. See Fig. 2.

7. Load stroller seat with

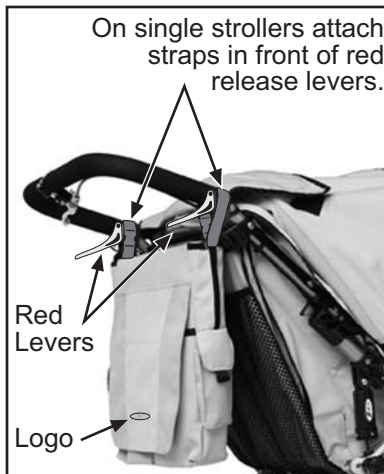


Fig. 3 Diaper Bag properly attached to single stroller.



Fig. 4 Diaper Bag properly attached to double stroller.

minimum weight of 10 lb. Fasten stroller Seat Safely Harness to secure the child before attaching Diaper Bag. See "Seat Safety Harness" section of your BOB stroller Owners Manual.

8. Orient Diaper Bag so logo is facing rearwards on stroller. Loop each strap around most forward part of handlebar on each respective side and fasten side release buckles. On single strollers attach in front of red levers (Fig. 3). On double strollers attach directly behind crossbar (Fig. 4)

9. Adjust Cam-Locks as necessary to center and raise Diaper Bag to maximum height. Tuck in any extra strap length and zip end pockets upward to close.

10. To remove Diaper Bag, unfasten side release buckles. Always remove the Diaper Bag before removing child and/or luggage from stroller. When using the Shoulder Strap, Attachment Straps and Cam-Locks may be hidden inside each zippered end pocket at Diaper Bag ends.

CARE INSTRUCTIONS

Clean the fabric of Diaper Bag and Change Pad by hand with clean damp cloth or sponge and air dry flat. Removable Pouch may be hand washed in soapy water and air-dried. Do not dry clean, iron, or place in dryer.

LIMITED WARRANTY

BOB Trailers Inc. takes pride in its workmanship and strives to manufacture the best products possible. Therefore, we warrant the Diaper Bag against defects in material and workmanship subject to the conditions listed below. Since no product is indestructible, it does not cover defects attributable to or resulting from normal wear, abuse or alteration.

- The Diaper Bag is warranted for one year from the date of original purchase.
- Warranty is only valid for the original purchaser.
- Proof of purchase is required to exercise this warranty.
- Labor and freight charges are not included.
- Normal wear, neglect, abuse, accidents, and improper use are not covered by this warranty.
- Warranty claims must be made through an authorized dealer.
- This warranty is limited to the repair or replacement of the defective part. BOB Trailers, Inc. shall in no event be responsible for consequential or special damages.
- This Limited Warranty is the only express or implied warranty applicable to BOB Trailers, Inc. Any implied warranties, including warranties of merchantability and fitness shall be limited in scope and duration in accordance with this limited warranty.