



WEATHER/SUN SHIELD INSTRUCTIONS

Single and Duallie®

Congratulations on your purchase of a BOB® Weather Shield or Sun Shield. The Weather Shield's water resistant design helps to protect your child from rain and wind while still allowing a view of the world. The Sun Shield's specially designed mesh screen reduces the sun's harmful Ultraviolet UVA/UVB rays and helps to provide a barrier to wind and flying insects.

NOTE: This manual will guide you through the installation of your Weather/Sun Shield for all single or Duallie® BOB Revolutions®, Stroller Strides®, Sport Utility Strollers and Ironman® strollers.

Before attempting to use or attach your new Weather/Sun Shield, read and understand these instructions completely to insure proper assembly and operation. If you are unclear on any point, contact your dealer or BOB before use.

This product is designed exclusively for use with BOB single or Duallie strollers. It is not intended for use with other strollers or products.

⚠ WARNINGS ⚠

FAILURE TO FOLLOW THESE WARNINGS AND INSTALLATION INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.

- When the Weather/Sun Shield is used, the stroller rear canopy flap must be in the correct position (see Warning Tag on stroller canopy flap) and follow instructions below. This will insure proper airflow and avoid danger of suffocation.
- The Weather Shield is made of a non-breathable material. To avoid danger of suffocation and excessive temperatures, follow all installation instructions.
- Always make sure all vents are unobstructed.
- The Weather/Sun Shield is not designed to work with optional Infant Car Seat Adapter with car seat installed.
- Do not use Weather Shield when temperatures exceed 65°F/18°C. Use in higher temperatures can cause unsafe conditions inside the Weather Shield.
- The Sun Shield reduces the exposure to sun, heat and insects but does not eliminate them.
- Never leave children unattended in stroller, with or without Weather/Sun Shield in use.
- When not in use, keep Weather/Sun Shield out of reach of children.

INSTALLATION INSTRUCTIONS

⚠ WARNING When the Weather/Sun Shield is used, the rear canopy flap must be in correct position as described below. This will insure proper airflow and avoid danger of suffocation.

1. Set Parking Brake (see your stroller Owner's Manual).
2. Place seat(s) in fully upright position (see your stroller Owner's Manual).
3. Position canopy fabric by following steps on warning tag, warning tag is located on canopy flap of your stroller as shown in Fig. 1.
4. Place canopy supports in position as shown in Fig. 2, then fold canopy flap over and secure to Velcro on top of canopy (Fig. 3).
5. Inspect opening between seat(s) and canopy(ies) to make sure the air passage(s) are unobstructed (Fig. 4).
6. Place Weather/Sun Shield on the stroller so it's rear flap drapes over the back of stroller (between the handlebars see Fig. 5) and the seam above the window is aligned with the forward canopy supports.



Fig. 1 Warning Tag Location

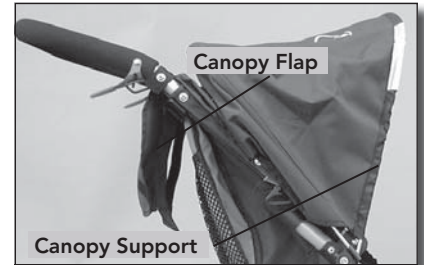


Fig. 2 Canopy Support in Position



Fig. 3 Canopy Flap in Position

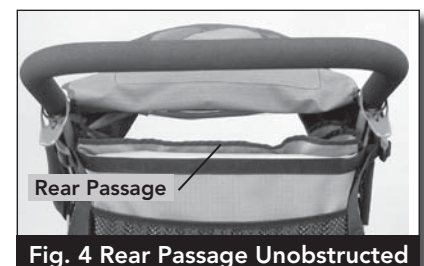


Fig. 4 Rear Passage Unobstructed



Fig. 5 Weather/Sun Shield Placed

7. Stretch the Weather/Sun Shield's elastic cords on each side under each respective shock knob as shown in Fig. 6. The elastic cords are located along each side of the Weather/Sun Shield in between the silver reflective fabric.

8. Attach the Velcro on the black webbing to the Velcro on the back flap of the Weather/Sun Shield as shown in Fig. 6 (take note that Velcro on webbing is double sided, so make sure to orient such that the Velcro loop on webbing mates up with the Velcro loop on the Weather/Sun Shield back flap).

NOTE: Step 9 ONLY applies to (single and Duallie) Sport Utility Strollers or Ironman strollers. If you do not have one of these stroller models, skip to step 10.

9. Locate black plastic end plugs at outboard ends of stroller. Note hole on top of each plug in Fig. 7. Locate metal stay at front of Weather/Sun Shield. Pull Weather/Sun Shield forward and insert ends of metal stay into holes on the black plastic plugs.

10. Stretch the elastic edges of the Weather Shield and route under sides of stroller frame. See Fig. 8 for Sport Utility Stroller and Ironman proper routing example. See Fig. 9 for Revolution and Stroller Strides Stroller proper routing example.

11. Align rear vents on Weather Shield or mesh on Sun Shield with air passage(s) between top of seat back and canopy flap. Make sure all air passages and vents are unobstructed, you should be able to see through openings. Recline seat slightly if necessary to optimize airflow see Fig. 5.

12. To place child in the stroller, pull the front of the Weather/Sun Shield off the front of stroller, then lift up, stretch and roll over the forward edge of stroller canopy as shown in Fig. 10. This will temporarily hold the Weather/Sun Shield out of your way while you place the child into the seat.

13. Once your child is secured in the seat harness (refer to your stroller Owner's Manual, Seat Harness section), unroll the Weather/Sun Shield from canopy and re-secure. Fig. 11 shows a Weather/Sun Shield correctly installed as described in steps above.

NOTE: The Sun Shield has a specially designed mesh front and does not require additional vents like shown on the Weather/Sun Shield in Fig.11.

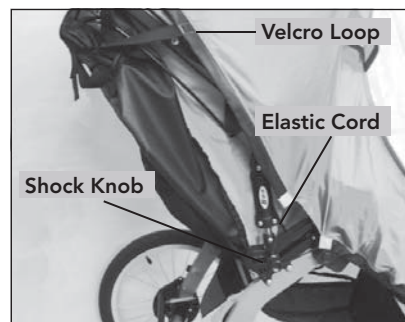


Fig. 6 Elastic Under Shock Knob

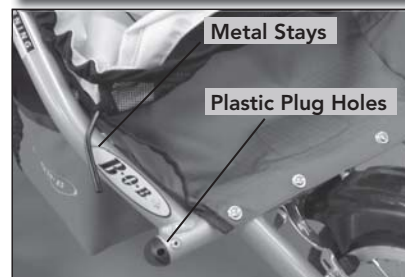


Fig. 7 Front Attachment Detail

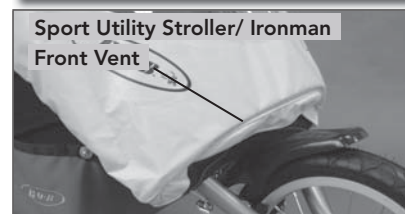


Fig. 8 Elastic Properly Routed

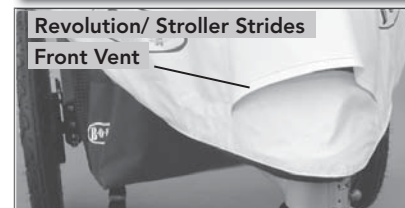


Fig. 9 Elastic Properly Routed



Fig. 10 Shield Over Canopy Edge

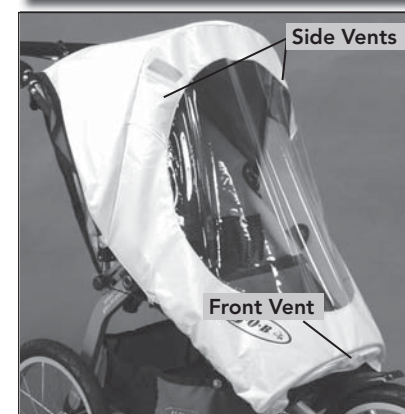


Fig. 11 Shield Correctly Installed

CARE INSTRUCTIONS

Hand wash cold, hang dry. Do not dry clean, iron or place in dryer.

LIMITED WARRANTY

BOB Trailers Inc. takes pride in its workmanship and strives to manufacture the best products possible. Therefore, we warranty our Weather/Sun Shields against defects in material and workmanship subject to the conditions listed below. Since no product is indestructible, it does not cover defects attributable to or resulting from normal wear, abuse or alteration.

BOB Weather/Sun Shields are warranted for one year from the date of original purchase.

- Warranty is only valid for the original purchaser.
- Proof of purchase is required to exercise this warranty.
- Labor and freight charges are not included.
- Normal wear, neglect, abuse, accidents, improper use are not covered by this warranty.
- Warranty claims must be made through an authorized dealer.
- This warranty is limited to the repair or replacement of the defective part. BOB shall in no event be responsible for consequential or special damages.
- This limited warranty is the only express or implied warranty applicable to BOB. Any implied warranties, including warranties of merchantability and fitness shall be limited in scope and duration in accordance with this limited warranty.

Copyright © 2010 BOB Trailers, Inc.

BOB TRAILERS, Inc.

(800) 893-2447

www.bobgear.com